


RS-485 (Modbus RTU)

GND
-
+

Power Supply 12 VAC/VDC
Vmin = 11V, Vmax=18V
Imax < 50mA

NOTE: Negative power supply
terminal and output signal
'common' (-) are electrically tied
together.

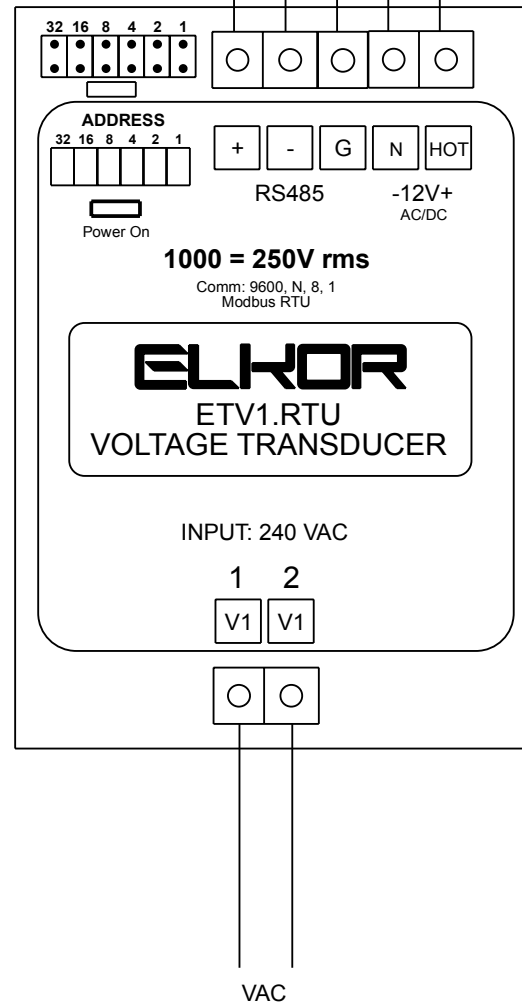

INPUT: 300 VAC - Maximum
240 VAC - Nominal

ISOLATION: 4kV / 1 minute

RESOLUTION: 10 bit

COMMUNICATION: MODBUS RTU, 9600, N, 8, 1

ELKOR Technologies Inc.		
DRAWN: PCK	TITLE: ETV1.RTU - RS-485 Voltage Transducer	CODE:
CHECKED: CKK		
DATE: 2007/06/08	FILE: ETV1_RTU.t4g	SHEET: 1 OF 1